

White Light Source

AQ4305

A high power white light source for optical devices and optical fibers characterization




Outline

The AQ4305 White Light Source provide incoherent light to measure wavelength dependent loss characteristics for optical devices and optical fibers, in conjunction with an optical spectrum analyzer. The AQ4305 higher power density (more than 5dB at 1310nm) compared to previous model allows significantly faster sweep time of the optical spectrum analyzer. The wide wavelength range 400 to 1800nm provides various applications from visible band to all telecomm band.


Feature

- High power: -40dBm or more (at 50/125 μ m MMF)
- Optical output: Free space
- High output stability of +/-0.05dB

Spectrum

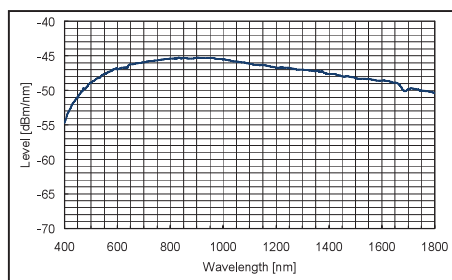

Optical Power GI50/125µm(RBW:10nm)

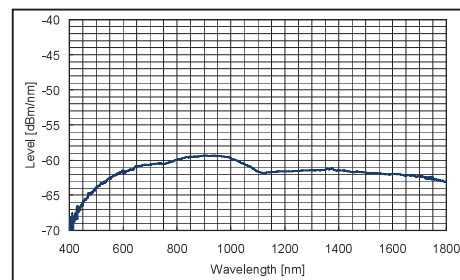


Optical Power SM10/125µm (RBW 10nm)


White Light Source **AQ4305**

Application

Basic configuration for optical fibers and optical component characterization

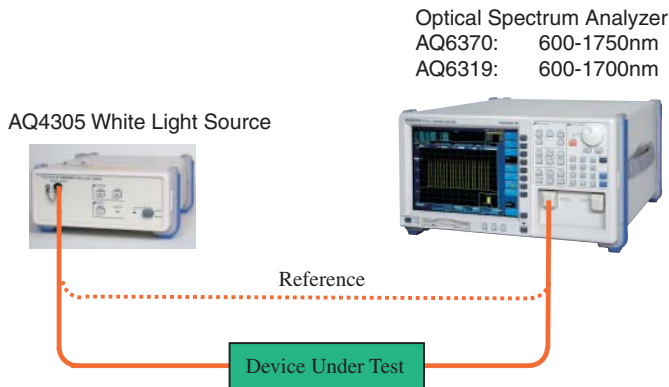

Optical filter characterization with Optical Spectrum Analyzer

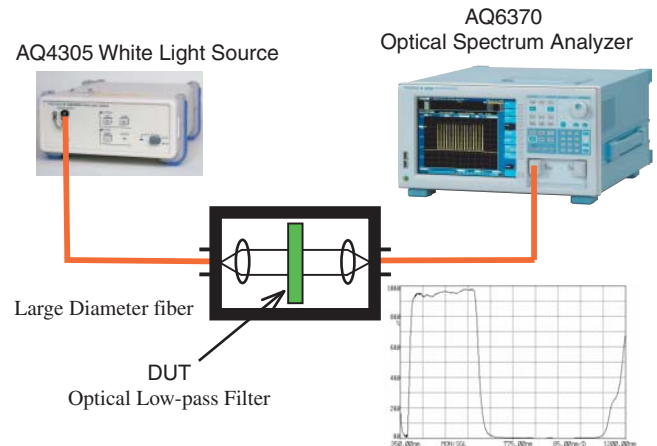

Specifications

Wavelength range	400 to 1800 nm
Optical output level *1) *2)	-40 dBm or more (50/125 μ m MMF : 2m, wavelength : 850 nm and 1310nm, spectral band width : 10 nm) -55 dBm or more (10/125 μ m SMF : 2m, wavelength 1550 nm, spectral band width : 10nm) -58dBm/nm (typ.) (50/125 μ m MMF : 2m, wavelength range : 400 to 1100nm) -65dBm/nm (typ.) (10/125 μ m SMF : 2m, wavelength range: 700 to 1700 nm)
Output stability *1	± 0.05 dB (23 ± 2 °C, one hour)
Functions	Optical output : ON/OFF Lamp : ON/OFF
Interface	GP-IB
Applicable optical connector	FC/PC type
Lamp	Halogen lamp (DC12V/50W), Life: 50 hours
Power requirement	AC100 to 120V($\pm 10\%$) /200 to 240V($\pm 10\%$), 50/60Hz, Approx.100VA
Environmental conditions	Operation temperature : +5 to +40 °C Storage temperature : -10 to +50 °C Humidity : 80%RH or less (not condensation)
Dimension and mass	Approx. 212(W) \times 88(H) \times 250(D) mm, Approx. 3kg
Accessory	Power cord : 1, Instruction manual : 1, Halogen lamp:5, Hexagon driver : 1

*1) after warm up one hour, after optical alignment.

*2) Specified fiber type; MMF=[ITU-T G.651], SMF=[ITU-T G.652]

Note) Specifications are subject to changed without notice.

Ordering Information

Model and Suffix Codes

Model	Suffix Code	Descriptions
814210301		White Light Source
	-D	UL3P
	-F	CEE-C7
	-G	SAA-3P
	-Q	BS3P Rectangular
	-H	BS3P Round
	-M	UL3P with 3P/2P Converter
	/CE	CE Marking

YOKOGAWA 

YOKOGAWA ELECTRIC CORPORATION
Communication & Measurement Business Headquarters /Phone: (81)-422-52-6768, Fax: (81)-422-52-6624
E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA Phone: (1)-770-253-7000, Fax: (1)-770-251-6427
YOKOGAWA EUROPE B.V. Phone: (31)-33-4641858, Fax: (31)-33-4641859
YOKOGAWA ENGINEERING ASIA PTE. LTD. Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 02/b] Copyright ©2004

Printed in Japan, 610(KP)